

Pre-Conditioned Air Combo Units



Cooling, Heating, 28.5 VDC All In One Low Profile Unit




custom paint shown

Standard Features:

- Easy to operate
- 80 kW Tier 3, Cummins genset
- 30 kW, 2 stage heat
- 28.5 VDC ground power unit on units with GPU
 - 1600A Starting
 - 300A Continuous
- 40 ft GPU cable on units with GPU
- Dual scroll compressors
- R-407c refrigerant
- 35° F (2° C) discharge air temperature at unit
- 21" WC pressure at end of hose
- 50' light weight, scuff resistant
- 14" Ø hose with 8" GAC connector
- VFD fan motor controller
- Low profile, fits under most wings
- Low fuel warning beacon
- No fuel shut down
- Bi-swing control panel doors
- Block heater receptacle
- Weatherproof panel
- Fifth wheel steering
- Heavy duty trailer
- Steel bumper
- Towbar actuated parking brake
- Solid rubber rear wheels
- Finish: Durable Powder Coat Tronair Blue

Specifications:

Model	Cooling Output ton - US (metric)	GPU in (cm)	Length in (cm)	Width in (cm)	Height lb (kg)	Weight
17-7513-0000.....	20 (17.8).....	YES.....	186 (472.4).....	95 (241).....	70.5 (179).....	8,000 (3,629)
17-7514-0000.....	30 (26.8).....	YES.....	186 (472.4).....	95 (241).....	80.5 (204.5).....	8,000 (3,629)
17-7515-0000.....	20 (17.8).....	NO.....	186 (472.4).....	95 (241).....	70.5 (179).....	7,300 (3,311)
17-7516-0000.....	30 (26.8).....	NO.....	186 (472.4).....	95 (241).....	80.5 (204.5).....	7,300 (3,311)

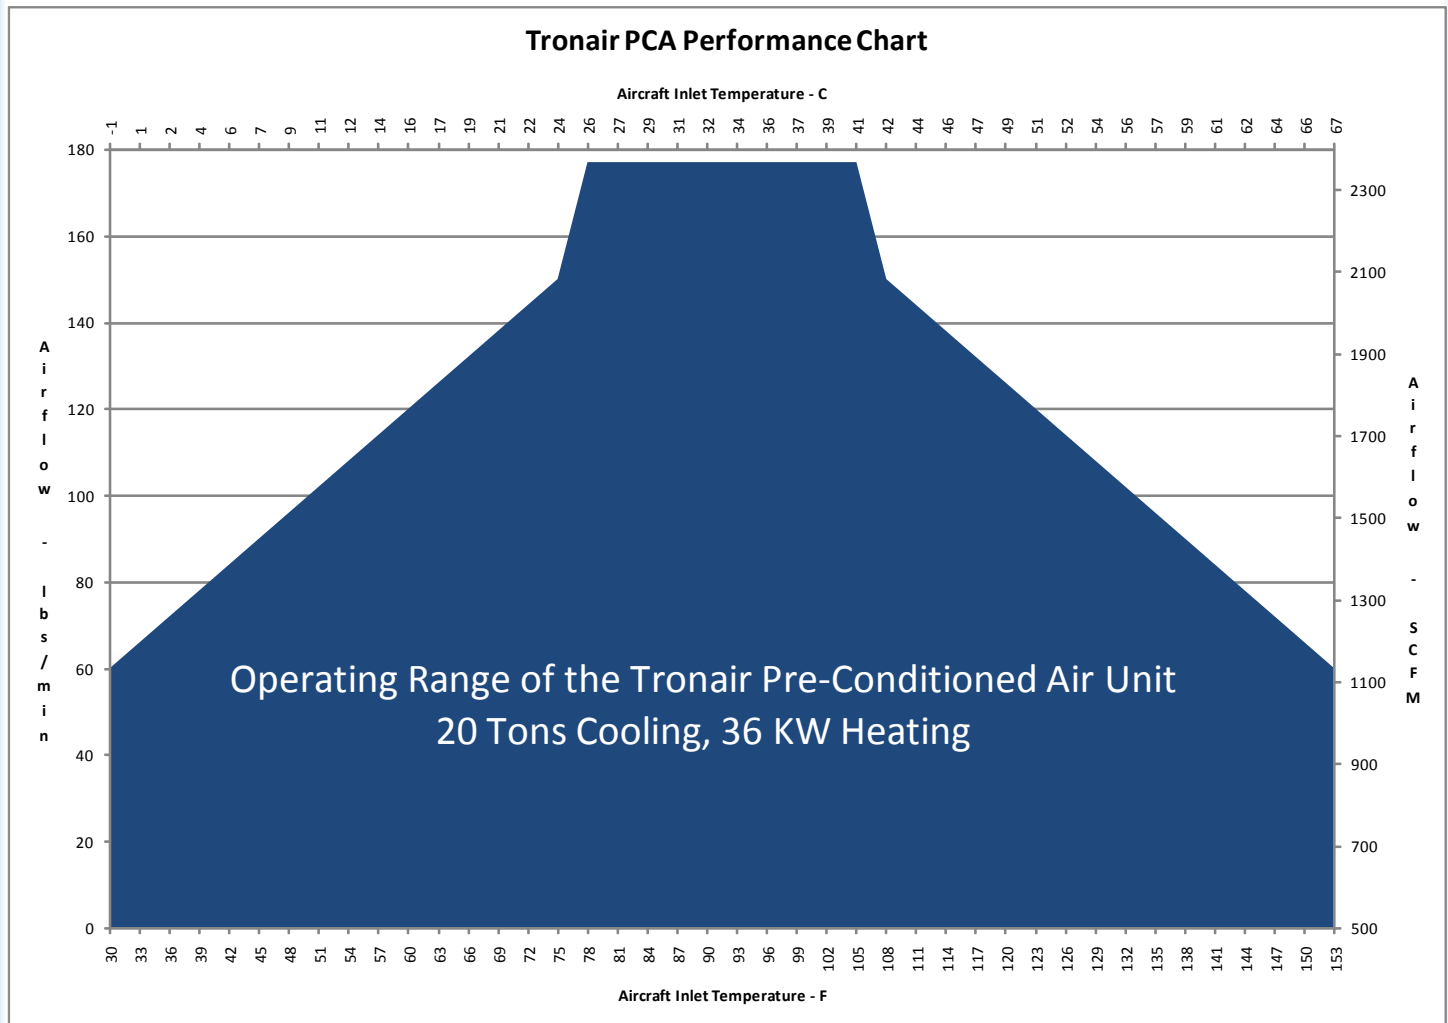

www.tronair.com

Tronair • Email: sales@tronair.com • Phone: 419-866-6301 or 800-426-6301 • Fax: 419-867-0634

Asia Sales Offices: **China** - Email: tronairchina@tronair.com • Phone: 86-592-5560735 • Fax: 86-592-5563132

Asia/Australia - Email: tronairasia@tronair.com • Phone: 66-2665-6511 • Fax: 66-2204-1858

Europe, Middle East & Africa Sales Office • Email: saleseurope@tronair.com • Phone: 44-0-113-245-3300 • Fax: 44-0-113-322-0436

TR021210