

Fuel Transfer Cart

Safely fuel and defuel aircraft while cleaning - Remove water and particles

Standard Features:

- Removes water and particles
- Air operated to eliminate spark hazard
- No electricity required
- Connects to central fueling port
- Transfer wing to wing, tip tank to main tank
- 10 cfm (4.7 lps) at 50 psi (33 bar) shop air required
- Diaphragm pump with air inlet control valve and regulator
- Certified pressure 0 to 100 psi (0 to 6.8 bar) gauge
- One micron filter with water saturation shut-off
- 2 static discharge reels: 20 ft (6 m) and 50 ft (15 m) long
- 50 psi (33 bar) maximum operating pressure
- 98% particle removal and less than 2 ppm free water in effluent fuel
- 15 ft (4.5 m) #16 discharge hose with shut-off valve
- 40 ft (12.2 m) #16 suction hose with shut-off valve
- Welded steel cart with tool tray
- 14 in (35.6 cm) wheels
- 15 gpm (57 lpm) flow
- Finish: Durable Powder Coat Tronair Blue




Specifications:

Model Number	Length in (cm)	Width in (cm)	Height in (cm)	Weight lb (kg)
07-3000-1921.....	25 (64).....	34 (86).....	41 (104).....	140 (63)

Fuel Sample Test Tools

Test fuel quickly without A mess, check contamination, water, and fuel color daily

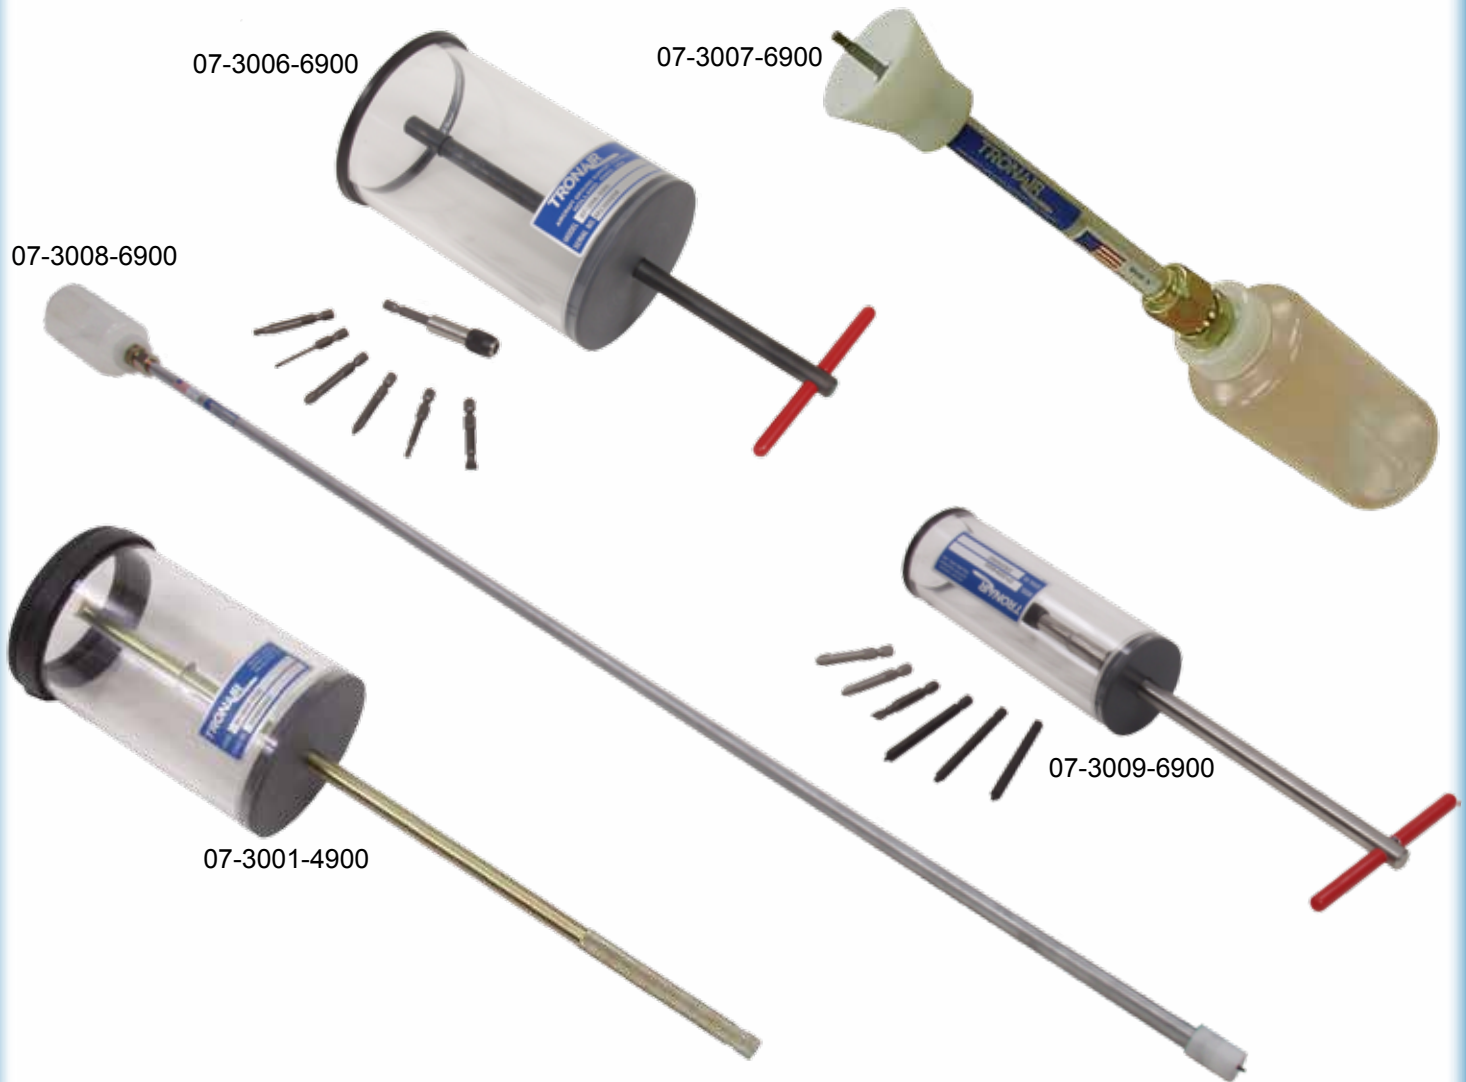

Specifications:

Model Number	Bits	Fluid Capacity oz (l)	Rim Diameter in (cm)	Length in (cm)	Weight lb (kg)
07-3001-4900	Wide Flat Head Custom	36 (1.06)	4 1/2 (11.4)	19 1/2 (50)	1 1/4 (.56)
*07-3006-6900	Slotted 12-14; Phillips #2, #3; Hex 1/8, 3/16, 3/32, 5/32	32 (.95)	4 3/4 (12.1)	15 3/4 (40)	3 (1.36)
07-3007-6900	Hex 5/32	32 (.95)	2 5/16 (6)	19 1/4 (49)	1 (.454)
07-3008-6900	Conical Head	32 (.95)	1 (2.5)	80 (203)	2 (.907)
07-3009-6900	Slotted 12-14; Phillips #2, #3; Hex 1/8, 3/32, 5/32	10.7 (.32)	2 1/2 (6.4)	13 (33)	2 (.907)

*Optional Custom Falcon 50 (H-2599 Bit) • Optional Custom Lear 35 (H-2598 Bit)

www.tronair.com

Tronair • Email: sales@tronair.com • Phone: 419-866-6301 or 800-426-6301 • Fax: 419-867-0634

Asia Sales Offices: China - Email: tronairchina@tronair.com • Phone: 86-592-5560735 • Fax: 86-592-5563132

Asia/Australia - Email: tronairasia@tronair.com • Phone: 662 2121463 • Fax: 662 2121332

Europe, Middle East & Africa Sales Office • Email: saleseurope@tronair.com • Phone: 44-0-113-245-3300 • Fax: 44-0-113-322-0436

TR030811